

iCaRL: Incremental Classifier and Representation Learning

Sylvestre-Alvise Rebuffi
University of Oxford/IST Austria
srebuffi@robots.ox.ac.uk

Alexander Kolesnikov
IST Austria
<http://www.ist.ac.at/~akolesnikov>

Christoph H. Lampert
IST Austria
<http://www.ist.ac.at/~chl>

Abstract

A major open problem on the road to artificial intelligence is the development of incrementally learning systems that learn about more and more concepts over time from a stream of data. In this work, we introduce a new training strategy, iCaRL, that allows learning in such a class-incremental way: only the training data for a small number of classes has to be present at the same time and new classes can be added progressively.

iCaRL learns strong classifiers and a data representation simultaneously. This distinguishes it from earlier works that were fundamentally limited to fixed data representations and therefore incompatible with deep learning architectures. We show by experiments on the CIFAR-100 and ImageNet ILSVRC 2012 datasets that iCaRL can learn many classes incrementally over a long period of time where other strategies quickly fail.

1. Introduction

Natural vision systems are inherently incremental: new visual information is continuously incorporated while existing knowledge is preserved. For example, a child visiting the zoo will learn about many new animals without forgetting the pets it has at home. In contrast, most artificial object recognition systems can only be trained in a static setting, where all object classes are known in advance and they the training data of all classes can be accessed at the same time.

As the field of computer vision moves closer towards artificial intelligence it becomes apparent that more flexible strategies are required to handle the large-scale and dynamic properties of real-world object categorization situations. At the very least, a visual object classification system should be able to incrementally learn about new classes, when training data for them becomes available. We call this scenario *class-incremental learning*.

Formally, we demand the following three properties of an algorithm to qualify as class-incremental:

- i) it should be trainable from a stream of data in which examples of different classes occur at different times,

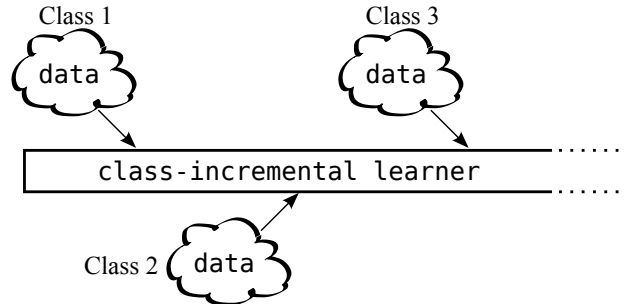


Figure 1. Class-incremental learning: an algorithm (learner) continuously learns from a sequential data stream in which new classes occur. At any point in time, the learner should be able to perform multi-class classification for all classes observed so far.

- ii) it should at any time provide a competitive multi-class classifier for the classes observed so far,
- iii) its computational requirements and memory footprint should remain bounded, or at least grow very slowly, with respect to the number of classes seen so far.

The first two criteria express the essence of class-incremental learning. The third criterion serves to exclude trivial algorithms, such as storing all training examples and retraining an ordinary multi-class classifier whenever new data becomes available.

Surprisingly, despite the vast progress that image classification has made over the last decades, there is not a single satisfactory class-incremental learning algorithm these days. Most existing multi-class techniques simply violate *i)* or *ii)* as they can only handle a fixed number of classes and/or need all training data to be available at the same time. Naively, one could try to overcome this by training classifiers from class-incremental data streams, *e.g.* using stochastic gradient descent optimization. This, however, will cause the classification accuracy to quickly deteriorate, an effect known in the literature as *catastrophic forgetting* or *catastrophic interference* [17]. The few existing techniques that do fulfill the above properties are principally limited to situations with a fixed data representation. They cannot be extended to deep architectures that learn classi-

Algorithm 1 iCaRL CLASSIFY

input x // image to be classified
require $\mathcal{P} = (P_1, \dots, P_t)$ // class exemplar sets
require $\varphi : \mathcal{X} \rightarrow \mathbb{R}^d$ // feature map
for $y = 1, \dots, t$ **do**
 $\mu_y \leftarrow \frac{1}{|P_y|} \sum_{p \in P_y} \varphi(p)$ // mean-of-exemplars
end for
 $y^* \leftarrow \operatorname{argmin}_{y=1, \dots, t} \|\varphi(x) - \mu_y\|$ // nearest prototype
output class label y^*

fiers and feature representations at the same time and are therefore not competitive anymore in terms of classification accuracy. A more detailed discussion of existing work can be found in Section 3.

In this work, we introduce *iCaRL* (*incremental classifier and representation learning*), a practical strategy for simultaneously learning classifiers and a feature representation in the class-incremental setting. Based on a careful analysis of the shortcomings of existing approaches, we introduce three main components that in combination allow iCaRL to fulfill all criteria put forth above. These three components are:

- classification by a *nearest-mean-of-exemplars* rule,
- *prioritized exemplar selection* based on herding,
- representation learning using *knowledge distillation* and *prototype rehearsal*.

We explain the details of these steps in Section 2, and subsequently put them into the context of previous work in Section 3. In Section 4 we report on experiments on the CIFAR and ImageNet datasets that show that iCaRL is able to class-incrementally learn over a long periods of time, where other methods quickly fail. Finally, we conclude in Section 5 with a discussion of remaining limitations and future work.

2. Method

In this section we describe iCaRL’s main components and explain how their combination allows true class-incremental learning. Section 2.1 explains the underlying architecture and gives a high-level overview of the training and classification steps. Sections 2.2 to 2.4 then provides the algorithmic details and explains the design choices.

2.1. Class-Incremental Classifier Learning

iCaRL is a strategy for learning classifiers and a feature representation simultaneously based on a stream of training data that comes in class-incremental form, *i.e.* sample sets X^1, X^2, \dots , where all examples of a set $X^y = \{x_1^y, \dots, x_{n_y}^y\}$ are of class $y \in \mathbb{N}$.

Classification. For classification, iCaRL relies on sets, P_1, \dots, P_t , of *exemplar images* that it selects dynamically

Algorithm 2 iCaRL INCREMENTALTRAIN

input X^s, \dots, X^t // training examples in per-class sets
input K // memory size
require Θ // current model parameters
require $\mathcal{P} = (P_1, \dots, P_{s-1})$ // current exemplar sets
 $\Theta \leftarrow \text{UPDATE REPRESENTATION}(X^s, \dots, X^t; \mathcal{P}, \Theta)$
 $m \leftarrow K/t$ // number of exemplars per class
for $y = 1, \dots, s - 1$ **do**
 $P_y \leftarrow \text{REDUCE EXEMPLAR SET}(P_y, m)$
end for
for $y = s, \dots, t$ **do**
 $P_y \leftarrow \text{CONSTRUCT EXEMPLAR SET}(X_y, m, \Theta)$
end for
 $\mathcal{P} \leftarrow (P_1, \dots, P_t)$ // new exemplar sets

out of the data stream. There is one such exemplar set for each observed class so far, and iCaRL ensures that the total number of exemplar images never exceeds a fixed parameter K . Algorithm 1 describes the mean-of-exemplars classifier that is used to classify images into the set of classes observed so far, see Section 2.2 for a detailed explanation.

Training. For training, iCaRL processes batches of classes at a time using an incremental learning strategy. Every time data for new classes is available iCaRL calls an update routine (Algorithm 2, see Sections 2.3 and 2.4). The routine adjusts iCaRL’s *internal knowledge* (the network parameters and exemplars) based on the additional information available in the *new observations* (the current training data). In particular, this is also how iCaRL learns about the existence of new classes.

Architecture. Under the hood, iCaRL makes use of a convolutional neural network (CNN) [14]¹. We interpret the network as a *trainable feature extractor*, $\varphi : \mathcal{X} \rightarrow \mathbb{R}^d$, followed by a single classification layer with as many sigmoid output nodes as classes observed so far [3]. All feature vectors are L^2 -normalized, and the results of any operations on feature vectors, *e.g.* averages, are also re-normalized, which we do not write explicitly to avoid a cluttered notation.

We denote the parameters of the network by Θ , split into a fixed number of parameters for the feature extraction part and a variable number of weight vectors. We denote the latter by $w_1, \dots, w_t \in \mathbb{R}^d$, where here and in the following sections we use the convention that t denotes the number of classes that have been observed so far. The resulting network outputs are, for any class $y = 1, \dots, t$,

$$g_y(x) = \frac{\exp(a_y(x))}{1 + \exp(a_y(x))} \quad \text{with } a_y(x) = w_y^\top \varphi(x). \quad (1)$$

¹In principle, the iCaRL strategy is largely architecture agnostic and could be used on top of other feature or metric learning strategies. Here, we discuss it only in the context of CNNs to avoid an overly general notation.

Note that even though one can interpret these outputs as probabilities, iCaRL uses the network only for representation learning, not for the actual classification step.

Resource usage. Due to its incremental nature, iCaRL does not need a priori information about which and how many classes will occur, and it can –in theory– run for an unlimited amount of time. At any time during its runtime its memory requirement will be the size of the feature extraction parameters, the storage of K exemplar images and as many weight vectors as classes that have been observed. This knowledge allows us to assign resources depending on the application scenario. If an upper bound on the number of classes is known, one can simply pre-allocate space for as many weight vectors as required and use all remaining available memory to store exemplars. Without an upper limit, one would actually grow the number of weight vectors over time, and decrease the size of the exemplar set accordingly. Clearly, at least one exemplar image and weight vector is required for each classes to be learned, so ultimately, only a finite number of classes can be learned, unless one allows for the possibility to add more resources over the runtime of the algorithm. Note that iCaRL can handle an increase of resources on-the-fly without retraining: it will simply not discard any exemplars unless it is forced to do so by memory limitations.

2.2. Nearest-Mean-of-Exemplars Classification

iCaRL uses a *nearest-mean-of-exemplars* classification strategy. To predict a label, y^* , for a new image, x , it computes a prototype vector for each class observed so far, μ_1, \dots, μ_t , where $\mu_y = \frac{1}{|P_y|} \sum_{p \in P_y} \varphi(p)$ is the average feature vector of all exemplars for a class y . It also computes the feature vector of the image that should be classified and assigns the class label with most similar prototype:

$$y^* = \operatorname{argmin}_{y=1, \dots, t} \|\varphi(x) - \mu_y\|. \quad (2)$$

Background. The nearest-mean-of-exemplars classification rule overcomes two major problems of the incremental learning setting, as can be seen by contrasting it against other possibilities for multi-class classification.

The usual classification rule for a neural network would be $y^* = \operatorname{argmax}_{y=1, \dots, t} g_y(x)$, where $g_y(x)$ is the network output as defined in (1) or alternatively with a softmax output layer. Because $\operatorname{argmax}_y g_y(x) = \operatorname{argmax}_y w_y^\top \varphi(x)$, the network’s prediction rule is equivalent to the use of a linear classifier with non-linear feature map φ and weight vectors w_1, \dots, w_t . In the class-incremental setting, it is problematic that the weight vectors w_y are *decoupled* from the feature extraction routine φ : whenever φ changes, all w_1, \dots, w_t must be update as well. Otherwise, the network outputs will change uncontrollably, which is observable as

Algorithm 3 iCaRL UPDATE REPRESENTATION

input X^s, \dots, X^t // training images of classes s, \dots, t
require $\mathcal{P} = (P_1, \dots, P_{s-1})$ // exemplar sets
require Θ // current model parameters

// form combined training set:

$$\mathcal{D} \leftarrow \bigcup_{y=s, \dots, t} \{(x, y) : x \in X^y\} \cup \bigcup_{y=1, \dots, s-1} \{(x, y) : x \in P^y\}$$

// store network outputs with pre-update parameters:

for $y = 1, \dots, s - 1$ **do**
 $q_i^y \leftarrow g_y(x_i)$ for all $(x_i, \cdot) \in \mathcal{D}$
end for

run network training (e.g. BackProp) with loss function

$$\ell(\Theta) = -\sum_{(x_i, y_i) \in \mathcal{D}} \left[\sum_{y=s}^t \delta_{y=y_i} \log(g_y(x_i)) \quad // \text{classification loss} \right. \\ \left. + \sum_{y=1}^{s-1} q_i^y \log(g_y(x_i)) \right] \quad // \text{distillation loss}$$

catastrophic forgetting. In contrast, the nearest-mean-of-exemplars rule (2) does not have decoupled weight vectors. The class-prototypes automatically change whenever the feature representation changes, causing the classifier to be robust against changes of the feature representation.

The choice of the average vector as prototype is inspired by the *nearest-class-mean* classifier [19] for incremental learning with a fixed feature representation. In the class-incremental setting, we cannot make use of the true class mean, since all training data would have to be stored in order to recompute this quantity after a representation change. Instead, we use the average over a flexible number of exemplars that are chosen in a way to provide a good approximation to the class mean.

Note that, because we work with normalized feature vectors, Equation (2) can be written equivalently as $y^* = \operatorname{argmax}_y \mu_y^\top \varphi(x)$. Therefore, we can also interpret the classification step as classification with a weight vector, but one that is not decoupled from the data representation but changes consistently with it.

2.3. Representation Learning

Whenever iCaRL obtains data, X^s, \dots, X^t , for new classes, s, \dots, t , it updates its feature extraction routine and the exemplar set. Algorithm 3 lists the steps for incrementally improving the feature representation. First, iCaRL constructs an augmented training set consisting of the currently available training examples together with the stored exemplars. Next, the current network is evaluated for each example and the resulting network outputs for all previous

Algorithm 4 iCaRL CONSTRUCTEXEMPLARSET

input image set $X = \{x_1, \dots, x_n\}$ of class y
input m target number of exemplars
require current feature function $\varphi : \mathcal{X} \rightarrow \mathbb{R}^d$
 $\mu \leftarrow \frac{1}{n} \sum_{x \in X} \varphi(x)$ // current class mean
for $k = 1, \dots, m$ **do**
 $p_k \leftarrow \operatorname{argmin}_{x \in X} \left\| \mu - \frac{1}{k} [\varphi(x) + \sum_{j=1}^{k-1} \varphi(p_j)] \right\|$
end for
 $P \leftarrow (p_1, \dots, p_m)$
output exemplar set P

Algorithm 5 iCaRL REDUCEEXEMPLARSET

input m // target number of exemplars
input $P = (p_1, \dots, p_{|P|})$ // current exemplar set
 $P \leftarrow (p_1, \dots, p_m)$ // *i.e.* keep only first m
output exemplar set P

classes are stored (not for the new classes, since the network has not been trained for these, yet). Finally, the network parameters are updated by minimizing a loss function that for each new image encourages the network to output the correct class indicator for new classes (*classification loss*), and for old classes, to reproduce the scores stored in the previous step (*distillation loss*).

Background. The representation learning step resembles ordinary network finetuning: starting from previously learned network weights it minimizes a loss function over a training set. As a consequence, standard end-to-end learning methods can be used, such as backpropagation with mini-batches, but also recent improvements, such as *dropout* [30], *adaptive stepsize selection* [11] or *batch normalization* [10], as well as potential future improvements.

There are two modifications to plain finetuning that aim at preventing or at least mitigating catastrophic forgetting. First, the training set is augmented. It consists not only of the new training examples but also of the stored exemplars. By this it is ensured that at least some information about the data distribution of all previous classes enters the training process. Note that for this step it is important that the exemplars are stored as images, not in a feature representation that would become outdated over time. Second, the loss function is augmented as well. Besides the standard classification loss, which encourages improvements of the feature representation that allow classifying the newly observed classes well, it also contains the distillation loss, which ensures that the discriminative information learned previously is not lost during the new learning step.

2.4. Exemplar Management

Whenever iCaRL encounters new classes it adjusts its exemplar set. All classes are treated equally in this, *i.e.*, when t classes have been observed so far and K is the total number of exemplars that can be stored, iCaRL will use $m = K/t$ exemplars (up to rounding) for each class. By this it is ensured that the available memory budget of K exemplars is always used to full extent, but never exceeded.

Two routines are responsible for exemplar management: one to select exemplars for new classes and one to reduce the sizes of the exemplar sets of previous classes. Algorithm 4 describes the exemplar selection step. Exemplars p_1, \dots, p_m are selected and stored iteratively until the target number, m , is met. In each step of the iteration, one more example of the current training set is added to the exemplar set, namely the one that causes the average feature vector over all exemplars to best approximate the average feature vector over all training examples. Note that the exemplar set is not truly a set in the mathematical sense, but rather a prioritized list. The order of its elements matters, with exemplars earlier in the list being more important. The procedure for removing exemplars is specified in Algorithm 5. It is particularly simple: to reduce the number of exemplars from any m' to m , one discards the exemplars $p_{m+1}, \dots, p_{m'}$, keeping only the examples p_1, \dots, p_m .

Background. The exemplar management routines are designed with two objectives in mind: the initial exemplar set should approximate the class mean vector well, and it should be possible to remove exemplars at any time during the algorithm’s runtime without violating this property.

The latter property is challenging because the actual class mean vector is not available to the algorithm anymore when the removal procedure is called. Therefore, we adopt a data-independent removal strategy, removing elements in fixed order starting at the end, and we make it the responsibility of the exemplar set construction routine to make sure that the desired approximation properties are fulfilled even after the removal procedure is called at later times. The prioritized construction is the logical consequence of this condition: it ensures that the average feature vector over any subset of exemplars, starting at the first one, is a good approximation of the mean vector. The same prioritized construction is used in *herding* [31] to create a representative set of samples from a distribution. There it was also shown that the iterative selection requires fewer samples to achieve a high approximation quality than, *e.g.*, random subsampling.

In combination, the steps for exemplar selection and reduction fit exactly to the incremental learning setting: the selection step is required for each class only once, when it is first observed and its training data is available. At later times, only the reduction step is called, which does not need access to any earlier training data.

3. Related work

iCaRL builds on the insights of multiple earlier attempts to address class-incremental learning. In this section, we describe the most important ones, structuring them on the one hand into learning techniques with *fixed data representations* and on the other hand into techniques that also learn the data representation, both from the *classical connectionists* era as well as recent *deep learning* approaches.

Learning with a fixed data representation. Assuming that the data representation is fixed, the main challenge for class-incremental learning is to design a classifier architecture that can accommodate new classes at any time during the training process without requiring access to all training data seen so far.

Mensink *et al.* [18] observed that the *nearest class mean* (NCM) classifier has this property. NCM represents each class as a prototype vector that is the average feature vector of all examples observed for the class so far. This vector can be computed incrementally from a data stream, so there is no need to store all training examples. A new example is classified by assigning it the class label that has a prototype most similar to the example’s feature vector, with respect to a metric that can also be learned from data. Despite (or because of) its simplicity, NCM has been shown to work well and be more robust than standard parametric classifiers in an incremental learning setting [18, 19, 23].

NCM’s main shortcoming is that it cannot easily be extended to the situation in which a nonlinear data representation should be learned together with the classifiers, as this prevents the class mean vectors from being computable in an incremental way. For iCaRL we adopt from NCM the idea of prototype-based classification. However, the prototypes we use are not the average features vectors over all examples but only over a specifically chosen subset, which allows us to keep a small memory footprint and perform all necessary update with constant computational effort.

Alternative approaches fulfill the class-incremental learning criteria *i)–iii)*, that we introduced in Section 1, only partially: Kuzborskij *et al.* [13] showed that a loss of accuracy can be avoided when adding new classes to an existing linear multi-class classifier, as long as the classifiers can be retrained from at least a small amount of data for all classes. Chen *et al.* [4, 5] introduced a system that autonomously retrieves images from web resources and identifies relations between them, but it does not incrementally learn object classifiers. Royer and Lampert [25] adapt classifiers to a time-varying data stream but their method cannot handle newly appearing classes. Li and Wechsler [15], Scheirer *et al.* [29, 28], as well as Bendale and Boulton [2] aimed at the related but distinct problem of *Open Set Recognition* in which test examples might come from other classes than the training examples seen so far. Polikar *et al.* [22, 21]

introduced an ensemble based approach that can handle an increasing number of classes but needs training data for all classes to occur repeatedly.

Representation learning. First attempts to learn data representations from time-varying data streams can already be found in the classical neural network literature, *e.g.* [1, 6, 24]. In particular, in the late 1980s McCloskey *et al.* [17] described the problem of *catastrophic forgetting*, *i.e.* the phenomenon that training a neural network with new data causes it to overwrite (and thereby forget) what it has learned on previous data. However, these classical works were mainly in the context of connectionist memory networks, not classifiers, and the networks used were small and shallow by today’s standards. Later it was observed that the existing algorithms and architecture changes are insufficient to prevent catastrophic forgetting, see Moe-Helgesen *et al.*’s survey [20] for classical methods, and Goodfellow *et al.*’s [7] for modern architectures.

A major achievement of the early connectionist works, however, is that they identified the two main strategies of how catastrophic forgetting can be addressed in principle: 1) by *freezing* parts of the network weights while at the same time *growing* the network (adding new nodes and weights) in order to preserve the ability to learn, 2) by *rehearsal*, *i.e.* continuously stimulating the network not only with the most recent, but also with earlier data.

Recent works on incremental learning of neural networks have mainly followed the freeze/grow strategy, which however requires allocating more and more resources to the network over time and therefore violates principle *iii)* of our definition of class-incremental learning. For example, Xiao *et al.* [32] learn a tree-structured model that is incrementally grown as more classes are observed. In the context of multi-task reinforcement learning, Rusu *et al.* [27] propose to grow the capacity of networks by extending all layer horizontally.

For iCaRL, we adopt the principle of *rehearsal*: to update the model parameters for learning a representation, we use not only the training data for the currently available classes, but also the exemplars from earlier classes, which are available anyway as they are required for the prototype-based classification rule. In addition, iCaRL also relies on *distillation* to prevent that information in the network deteriorates too much over time. Hinton *et al.* [9] originally proposed distillation to transfer information between different neural networks. In iCaRL, we use it to transfer information within a single network between different time points. The same principle has recently been used by Li and Hoiem [16] under the name of *Learning without Forgetting* (LwF) to incrementally train a single network for learning multiple tasks, *e.g.* multiple object recognition datasets. The main difference between this and the class-incremental multi-class situation is the prediction step: the multi-class

setting requires learning one classifier that for any input can predict any of the observed classes. In the multi-task (multi-dataset) setting, a separate classifier is learned for each task (dataset) and each classifiers is evaluated only on the data from its own dataset.

4. Experiments

We report the results of experiments on two well-known image classification datasets: CIFAR-100 [12] and ImageNet ILSVRC2012 [26]. Our main focus lies on comparing the classification accuracy of iCaRL with alternative class-incremental methods (Section 4.1). We also report on further experiments that shed light on iCaRL’s working mechanisms by isolating the effect of individual components (Section 4.2).

Datasets. The *CIFAR-100 dataset* consists of 60000 low-resolution images of 100 classes (500 images per class for training, 100 images per class for testing). We arrange the classes in a random order and process them in batches of 2, 5, 10, 20 or 50 classes at a time. As underlying network architecture we use a 32-layers ResNet [8] and we allow iCaRL to store up to $K = 2000$ exemplars. The evaluation measure is the standard multi-class accuracy.

The *ILSVRC 2012 dataset* consists of over 1.2 million high-resolution images of 1000 classes. We use the data in two settings: using only 100 classes that we process in batches of 10 (*ILSVRC-small*) or using all 1000 classes, processing them in batches of 100 (*ILSVRC-full*). In both cases, the classes are in random order. The underlying network is an 18-layers ResNet [8]. The maximal number of exemplars is $K = 20000$ and the evaluation measure is *top-5* accuracy on the *val* part of the dataset².

Implementation. For all methods we train the network using standard backpropagation with minibatches of size 128 and a weight decay parameter of 0.00001. For CIFAR, we rely on the *theano* package³ and each training step consists of 70 epochs. The learning rate starts at 2.0 and is divided by 5 after 49 and 63 epochs (7/10 and 9/10 of all epochs). For ILSVRC we make use of the *tensorflow* framework⁴ and train for 60 epochs in each step. The learning rate starts at 2.0 and is divided by 5 after 20, 30, 40 and 50 epochs (1/3, 1/2, 2/3 and 5/6 of all epochs). The parameters for both situations were selected empirically based on the results on a held out part of the training data. Note that the learning rates might appear large, but for our purpose they worked well, likely because we use binary cross-entropy in the network layer. Smaller rates would be required for a multi-class softmax layer.

²We cannot use the *test* part, as its labels are not public and the ImageNet evaluation server does not support class-incremental evaluation.

³<http://deeplearning.net/software/theano/>

⁴<https://www.tensorflow.org/>


4.1. Results

Our main set of experiments studies the classification accuracy of different methods under class-incremental conditions. Besides iCaRL we implemented and tested three alternative class-incremental methods. *Finetuning* learns an ordinary multi-class network without taking any measures to prevent catastrophic forgetting. It can also be interpreted as learning a multi-class classifier for new incoming classes by finetuning the previously learned multiclass classification network. *Fixed representation* also learns a multi-class classification network, but in a way that prevents catastrophic forgetting. It fixes the feature representation after the first batch of classes has been processed and the weights of the classification layer after the corresponding classes have been processed. For subsequent batches of classes, only the weights vectors of new classes are trained. Finally, we also compare to a network classifier that attempts at preventing catastrophic forgetting by using the distillation loss during learning, like iCaRL does, but that does not use an exemplar set. For classification, it uses the network output values themselves. This is essentially an application of the *Learning without Forgetting* idea to multi-class classification we, so denote it by LwF.MC.


Figure 2 shows the results. One can see that iCaRL clearly outperforms the other methods, and the more so the more incremental the setting is (*i.e.* the fewer classes can be processed at the same time). Amongst the other methods, *distillation*-based network training (LwF.MC) is always second best, except for *ILSVRC-full*, where it is better to fix the representation after the first batch of 100 classes. *Finetuning* always achieves the worst results, confirming that catastrophic forgetting is indeed a major problem for in class-incremental learning.

Figure 3 provides further insight into the behavior of the different methods. It shows the confusion matrices of the 100-class classifier on the CIFAR-100 datasets after training using batches of 10 classes at a time. One can see very characteristic patterns: iCaRL’s confusion matrix looks homogeneous over all classes, both in terms of the diagonal entries (*i.e.* correct predictions) as well as off-diagonal entries (*i.e.* mistakes). This shows that iCaRL has no intrinsic bias towards or against classes that it encounters early or late during learning. In particular, it does not suffer from catastrophic forgetting.

In contrast to this, the confusion matrices for the other classes show inhomogeneous patterns: *distillation*-based training (LwF.MC) has many more non-zero entries towards the right, *i.e.* for recently learned classes. Even more extreme is the effect for *finetuning*, where all predicted class labels come from the last batch of classes that the network has been trained with. The finetuned network simply *forgot* that earlier classes even exist. The *fixed representation* shows the opposite pattern: it prefers to output classes from

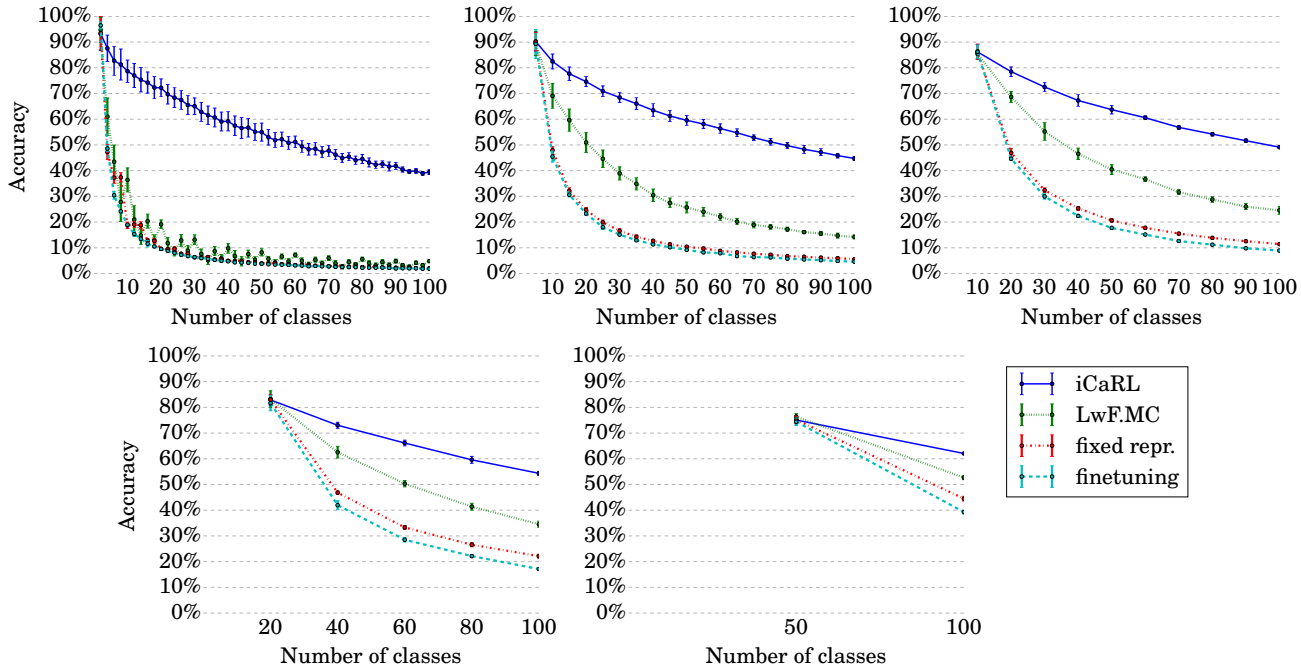

(a) Class-incremental training on CIFAR-100 with 2 (top left), 5 (top middle), 10 (top right), 20 (bottom left) or 50 (bottom right) classes per batch. The curves depict the average and standard deviations of the multi-class accuracies over 10 repeats.

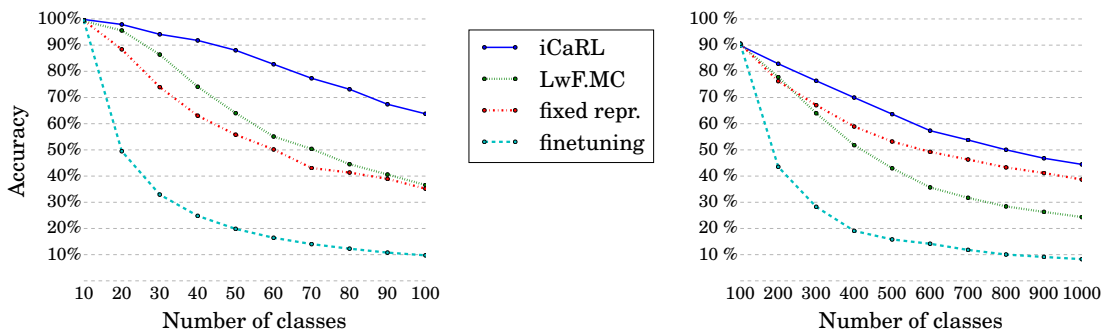

(b) Class-incremental training on *ILSVRC-small* (left) and *ILSVRC-full* (right). The curves depict the top-5 multi-class accuracy.

Figure 2. Experimental results on CIFAR-100 and ILSVRC: reported is the multi-class accuracy across all classes observed up to a certain time point. iCaRL clearly outperforms the other methods in this setting. Fixing the data representation after having trained on the first batch (*fixed repr.*) performs worse than distillation-based LwF.MC, except for *ILSVRC-full*. Finetuning the network without preventing catastrophic forgetting (*finetuning*) always leads to the worst results.

the first batch of classes it was trained on (which were used to obtain the data representation).

Confusion matrices for ILSVRC show the same patterns, they can be found in Figures 4–7 at the end of the manuscript.

4.2. Differential Analysis

To provide further insight into the working mechanism of iCaRL, we performed additional experiments on CIFAR-100, in which we isolate individual aspects of the methods.

First, we analyze why exactly iCaRL improves over plain finetuning-based training, from which it differs in

three aspects: by the use of the mean-of-exemplars classification rule, by the use of exemplars during the representation learning, and by the use of the distillation loss. We therefore created three hybrid setups: the first (*hybrid1*) learns a representation in the same way as iCaRL, but uses the network’s outputs directly for classification, not the mean-of-exemplar classifier. The second (*hybrid2*) uses the exemplars for classification, but does not use the distillation loss during training. The third (*hybrid3*) uses neither the distillation loss nor exemplars for classification, but it makes use of the exemplars during representation learning. For comparison, we also include LwF.MC again, which

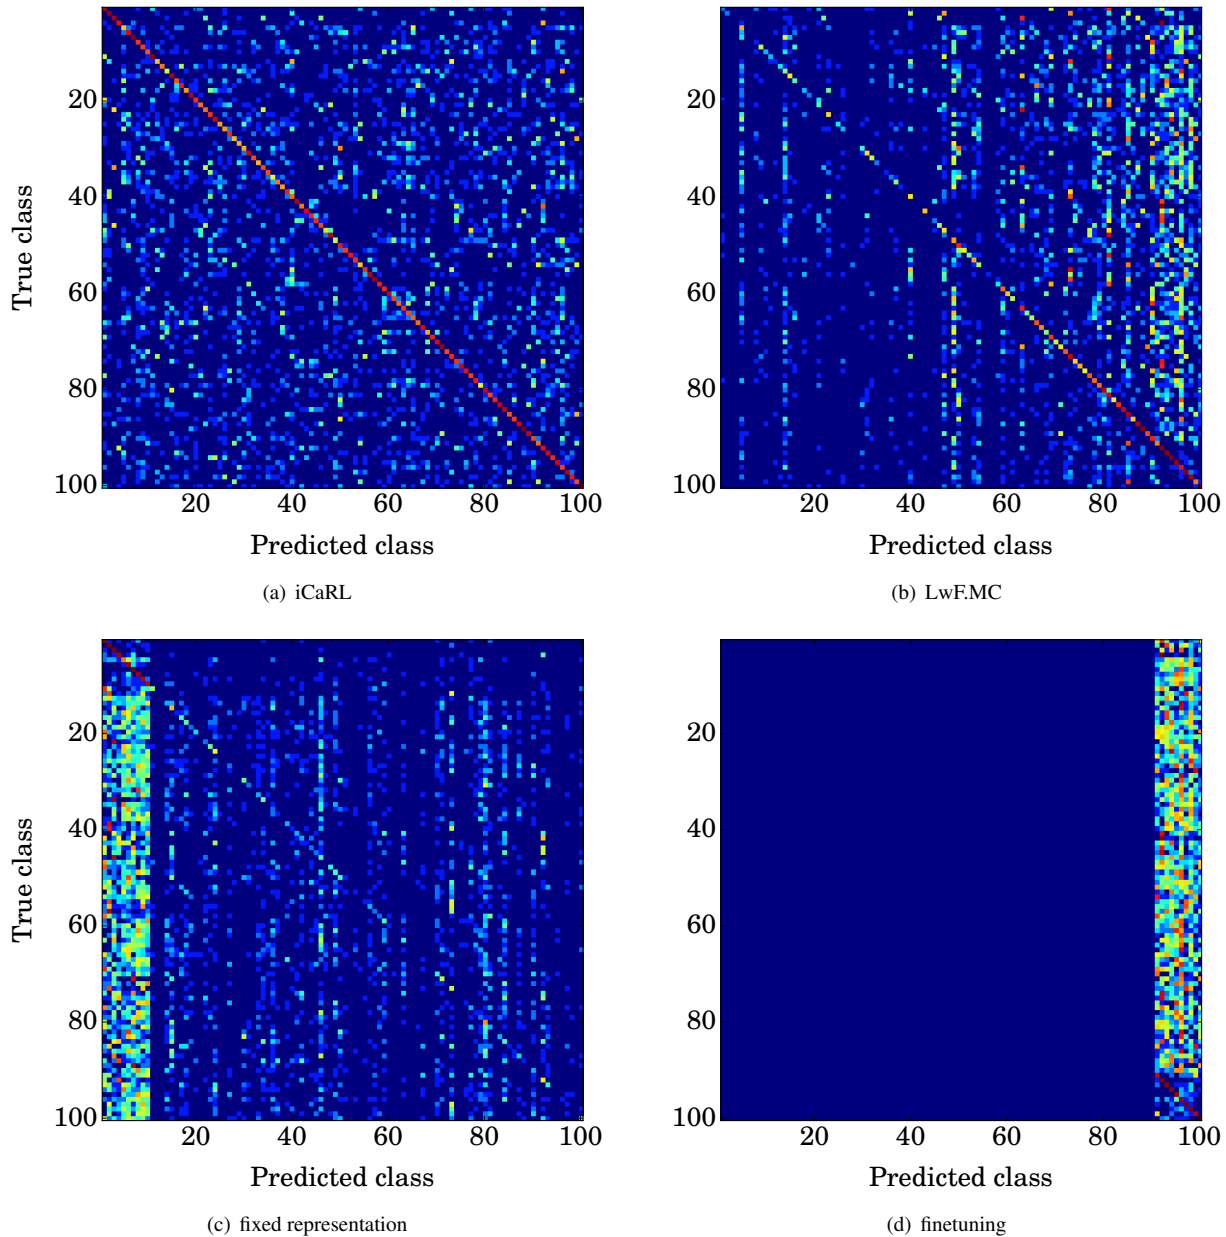


Figure 3. Confusion matrices of different method on CIFAR-100 (with entries transformed by $\log(1+x)$ for better visibility). iCaRL’s predictions are distributed close to uniformly over all classes, whereas LwF.MC tends to predict classes from recent batches more frequently. The classifier with fixed representation has a bias towards classes from the first batch, while the network trained by finetuning predicts exclusively classes labels from the last batch.

uses distillation, but no exemplars at all.

Table 1(a) summarizes the results as the average of the classification accuracies over all steps of the incremental training. One can see that the hybrid setups mostly achieve results in between iCaRL and LwF.MC, showing that indeed all of iCaRL’s new components contribute substantially to its good performance. In particular, the comparison of iCaRL with *hybrid1* shows that the mean-of-exemplar

classifiers is particularly advantageous for smaller batch sizes, *i.e.* when more updates of the representation are performed. Comparing iCaRL and *hybrid2* one sees that for very small class batch sizes, distillation can even hurt classification accuracy compared to just using prototypes. For larger batch sizes and fewer updates, the use of the distillation loss is clearly advantageous. Finally, comparing the result of *hybrid3* with LwF.MC clearly shows the effective-

Table 1. Average multi-class accuracy on CIFAR-100 for different modifications of iCaRL.

(a) Switching off different components of iCaRL (*hybrid1*, *hybrid2*, *hybrid3*, see text for details) leads to results mostly inbetween iCaRL and LwF.MC, showing that all of iCaRL’s new components contribute to its performance. See the main text for a further analysis.

batch size	iCaRL	<i>hybrid1</i>	<i>hybrid2</i>	<i>hybrid3</i>	LwF.MC
2 classes	57.0	36.6	57.6	57.0	11.7
5 classes	61.2	50.9	57.9	56.7	32.6
10 classes	64.1	59.3	59.9	58.1	44.4
20 classes	67.2	65.6	63.2	60.5	54.4
50 classes	68.6	68.2	65.3	61.5	64.5

(b) Replacing iCaRL’s mean-of-exemplars by a nearest-class-mean classifier (NCM) has only a small positive effect on the classification accuracy, showing that iCaRL’s strategy for selecting exemplars is effective.

batch size	iCaRL	NCM
2 classes	57.0	59.3
5 classes	61.2	62.1
10 classes	64.1	64.5
20 classes	67.2	67.5
50 classes	68.6	68.7

ness of exemplars in preventing catastrophic forgetting.

In a second set of experiments we study how much accuracy is lost by using the means-of-exemplars as classification prototypes instead of the nearest-class-mean (NCM) rule. For the latter, we use the unmodified iCaRL to learn a representation, but we classify images with NCM, where the class-means are recomputed after each representation update using the current feature extractor. Note that this requires storing all training data, so it would not qualify as a class-incremental method. The results in Table 1(b) show only minor differences between iCaRL and NCM, confirming that iCaRL reliably identifies representative exemplars.

5. Conclusion

We introduced iCaRL, a strategy for class-incremental learning that learns classifiers and a feature representation simultaneously. iCaRL’s three main components are: 1) a *nearest-mean-of-exemplars* classifier that is robust against changes in the data representation while needing to store only a small number of exemplars per class, 2) a *herding*-based step for prioritized exemplar selection, and 3) a representation learning step that uses the exemplars in combination with *distillation* to avoid catastrophic forgetting. Experiments on CIFAR-100 and ILSVRC 2012 show that iCaRL is able to learn incrementally over a long period of time where other methods fail quickly.

The main reason for iCaRL’s strong classification results are its use of exemplar images. While it is intuitive that being able to rely on stored exemplars in addition to the network parameters could be beneficial, we nevertheless find it an important observation how pronounced this effect is in the class-incremental setting. We therefore hypothesize that also other architectures should be able to benefit from using a combination of network parameters and exemplars, especially given the fact that many thousands of images can be stored (in compressed form) with memory requirements comparable to the sizes of current deep networks.

Despite the promising results, class-incremental classification is far from solved. In particular, iCaRL’s performance is still lower than what systems achieve when trained

in a batch setting, *i.e.* with all training examples of all classes available at the same time. In future work we plan to analyze the reasons for this in more detail with the goal of closing the remaining performance gap. We also plan to study related scenarios in which the classifier cannot store any of the training data in raw form, *e.g.* for privacy reasons.

Acknowledgments

This work was in parts funded by the European Research Council under the European Union’s Seventh Framework Programme (FP7/2007-2013) / ERC grant agreement no 308036.

References

- [1] B. Ans and S. Rousset. Avoiding catastrophic forgetting by coupling two reverberating neural networks. *Comptes Rendus de l’Académie des Sciences*, 320(12), 1997.
- [2] A. Bendale and T. Boulton. Towards open world recognition. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.
- [3] Y. Bengio, A. Courville, and P. Vincent. Representation learning: A review and new perspectives. *IEEE Transactions on Pattern Analysis and Machine Intelligence (T-PAMI)*, 35(8), 2013.
- [4] X. Chen, A. Shrivastava, and A. Gupta. NEIL: Extracting visual knowledge from web data. In *International Conference on Computer Vision (ICCV)*, 2013.
- [5] X. Chen, A. Shrivastava, and A. Gupta. Enriching visual knowledge bases via object discovery and segmentation. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2014.
- [6] R. M. French. Catastrophic interference in connectionist networks: Can it be predicted, can it be prevented? In *Conference on Neural Information Processing Systems (NIPS)*, 1993.
- [7] I. J. Goodfellow, M. Mirza, D. Xiao, A. Courville, and Y. Bengio. An empirical investigation of catastrophic forgetting in gradient-based neural networks. In *International Conference on Learning Representations (ICLR)*, 2014.
- [8] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. *arXiv preprint arXiv:1512.03385*, 2015.

- [9] G. Hinton, O. Vinyals, and J. Dean. Distilling the knowledge in a neural network. In *NIPS Workshop on Deep Learning*, 2014.
- [10] S. Ioffe and C. Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *International Conference on Machine Learning (ICML)*, 2015.
- [11] D. P. Kingma and J. Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, 2015.
- [12] A. Krizhevsky. Learning multiple layers of features from tiny images. Technical report, University of Toronto, 2009.
- [13] I. Kuzborskij, F. Orabona, and B. Caputo. From n to $n + 1$: Multiclass transfer incremental learning. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2013.
- [14] Y. LeCun, L. Bottou, Y. Bengio, and P. Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11), 1998.
- [15] F. Li and H. Wechsler. Open set face recognition using transduction. *IEEE Transactions on Pattern Analysis and Machine Intelligence (T-PAMI)*, 27(11), 2005.
- [16] Z. Li and D. Hoiem. Learning without forgetting. In *European Conference on Computer Vision (ECCV)*, 2016.
- [17] M. McCloskey and N. J. Cohen. Catastrophic interference in connectionist networks: The sequential learning problem. *Psychology of learning and motivation*, 24:109–165, 1989.
- [18] T. Mensink, J. Verbeek, F. Perronnin, and G. Csurka. Metric learning for large scale image classification: Generalizing to new classes at near-zero cost. In *European Conference on Computer Vision (ECCV)*, 2012.
- [19] T. Mensink, J. Verbeek, F. Perronnin, and G. Csurka. Distance-based image classification: Generalizing to new classes at near-zero cost. *IEEE Transactions on Pattern Analysis and Machine Intelligence (T-PAMI)*, 35(11), 2013.
- [20] O.-M. Moe-Helgesen and H. Strandén. Catastrophic forgetting in neural networks. Technical report, Norwegian University of Science and Technology (NTNU), 2005.
- [21] M. D. Muhlbaier, A. Topalis, and R. Polikar. Learn⁺⁺.NC: Combining ensemble of classifiers with dynamically weighted consult-and-vote for efficient incremental learning of new classes. *IEEE Transactions on Neural Networks (T-NN)*, 20(1), 2009.
- [22] R. Polikar, L. Upda, S. S. Upda, and V. Honavar. Learn⁺⁺: an incremental learning algorithm for supervised neural networks. *IEEE Transactions on Systems, Man, and Cybernetics, Part C*, 31(4), 2001.
- [23] M. Ristin, M. Guillaumin, J. Gall, and L. Van Gool. Incremental learning of NCM forests for large-scale image classification. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2014.
- [24] A. V. Robins. Catastrophic forgetting, rehearsal and pseudorehearsal. *Connection Science*, 7(2):123–146, 1995.
- [25] A. Royer and C. H. Lampert. Classifier adaptation at prediction time. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.
- [26] O. Russakovsky, J. Deng, H. Su, J. Krause, S. Satheesh, S. Ma, Z. Huang, A. Karpathy, A. Khosla, M. Bernstein, A. C. Berg, and L. Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision (IJCV)*, 115(3), 2015.
- [27] A. A. Rusu, N. C. Rabinowitz, G. Desjardins, H. Soyer, J. Kirkpatrick, K. Kavukcuoglu, R. Pascanu, and R. Hadsell. Progressive neural networks. *arXiv preprint arXiv:1606.04671*, 2016.
- [28] W. J. Scheirer, L. P. Jain, and T. E. Boult. Probability models for open set recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence (T-PAMI)*, 36, 2014.
- [29] W. J. Scheirer, A. Rocha, A. Sapkota, and T. E. Boult. Towards open set recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence (T-PAMI)*, 36, 2013.
- [30] N. Srivastava, G. E. Hinton, A. Krizhevsky, I. Sutskever, and R. Salakhutdinov. Dropout: a simple way to prevent neural networks from overfitting. *Journal of Machine Learning Research (JMLR)*, 15(1), 2014.
- [31] M. Welling. Herding dynamical weights to learn. In *International Conference on Machine Learning (ICML)*, 2009.
- [32] T. Xiao, J. Zhang, K. Yang, Y. Peng, and Z. Zhang. Error-driven incremental learning in deep convolutional neural network for large-scale image classification. In *International Conference on Multimedia (ACM MM)*, 2014.

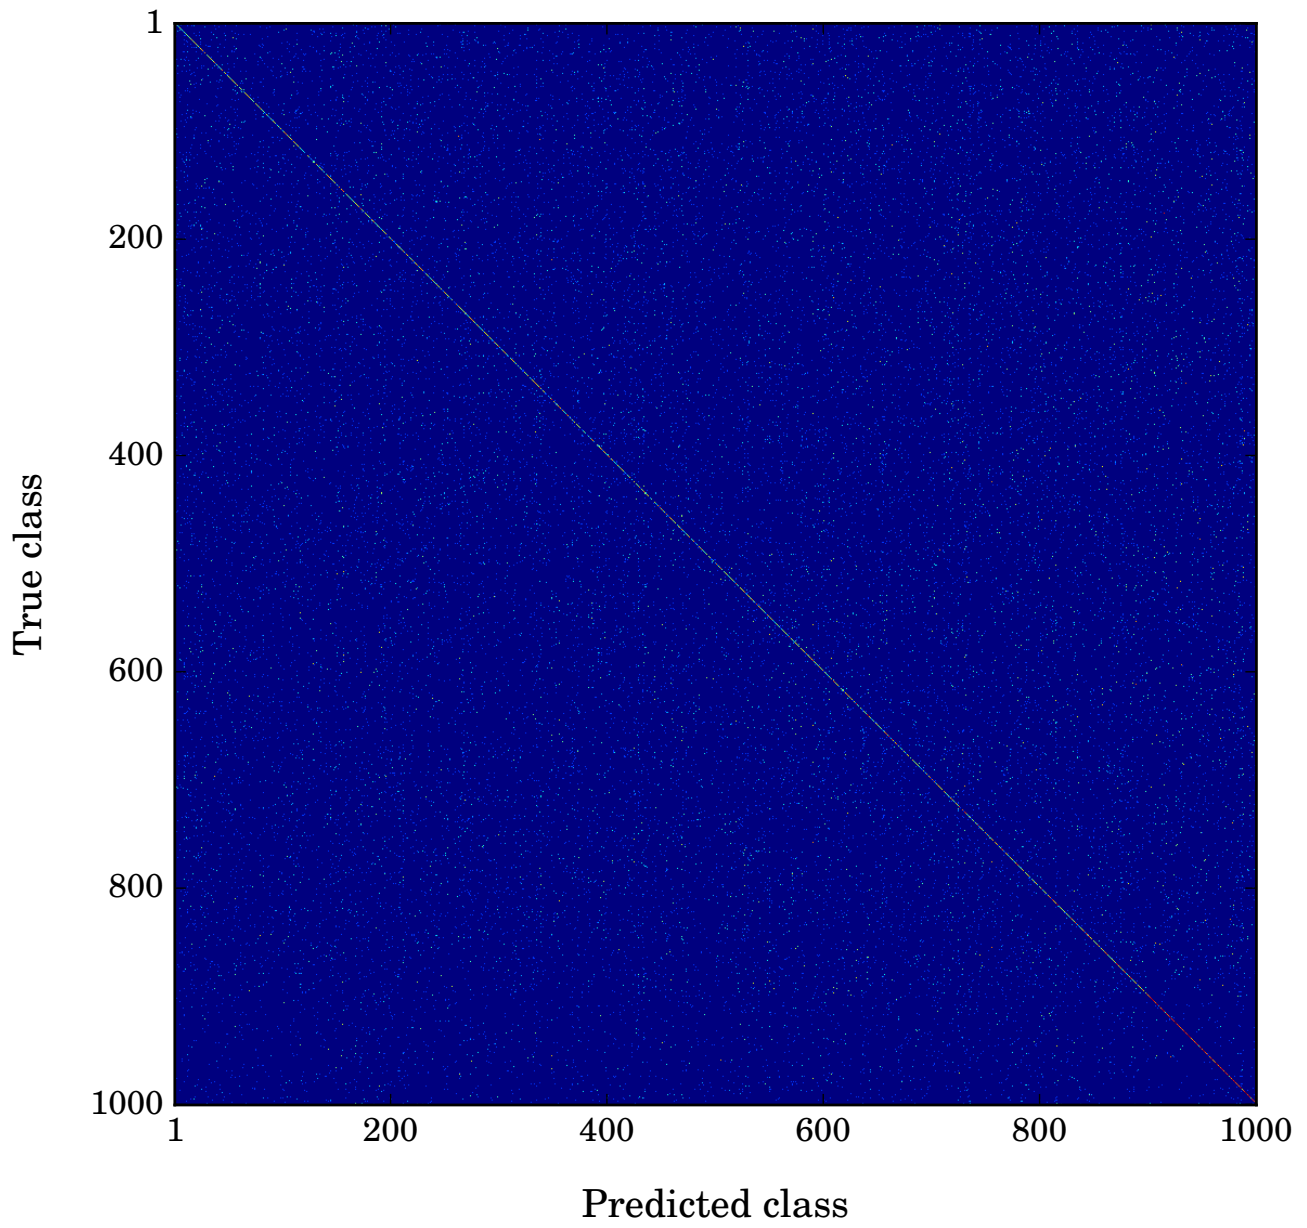


Figure 4. Confusion matrix for *iCaRL* on *ILSVRC-large* (1000 classes in batches of 100)

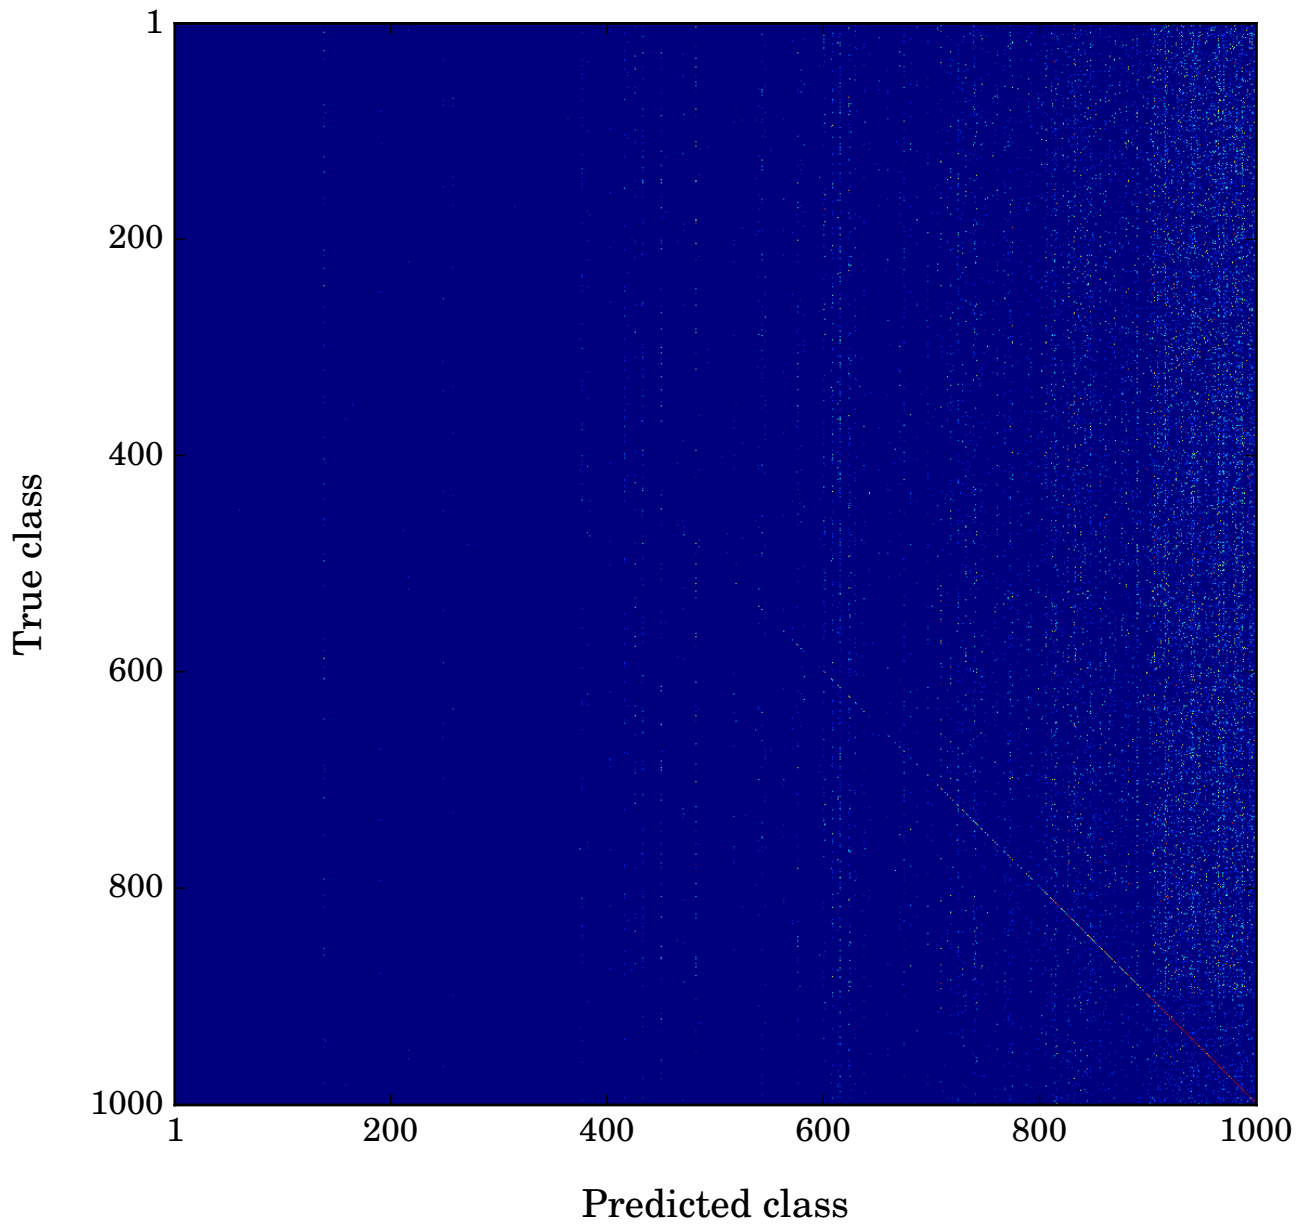


Figure 5. Confusion matrix for *LwF.MC* on *ILSVRC-large* (1000 classes in batches of 100)

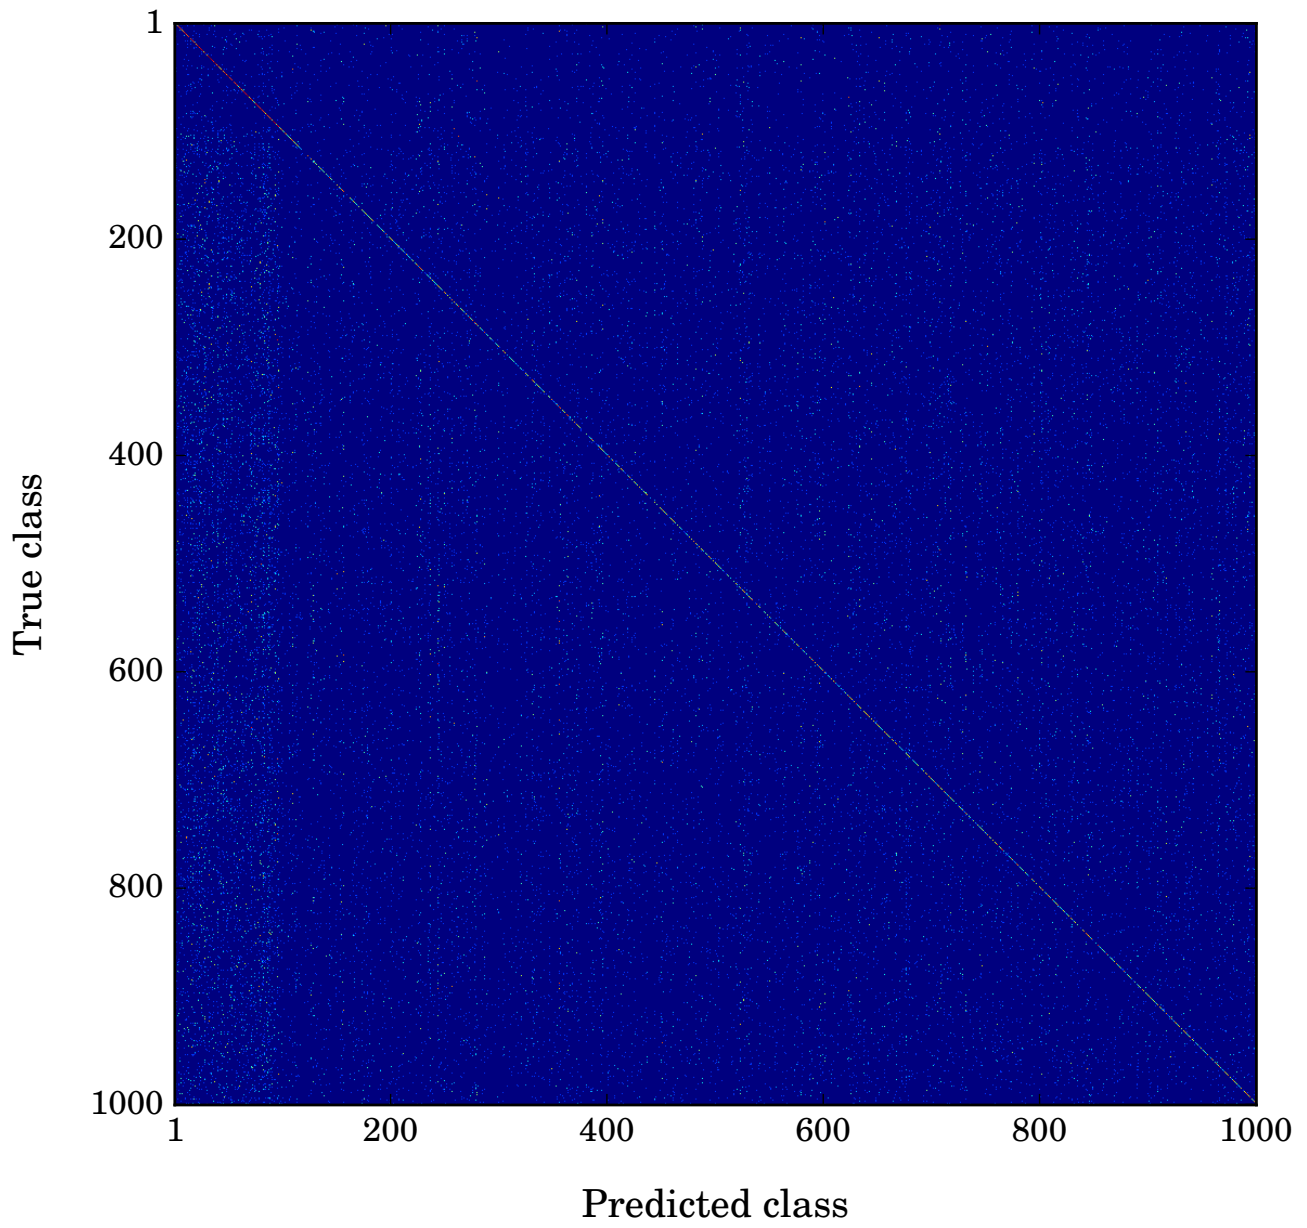


Figure 6. Confusion matrix for *fixed representation* on *ILSVRC-large* (1000 classes in batches of 100)

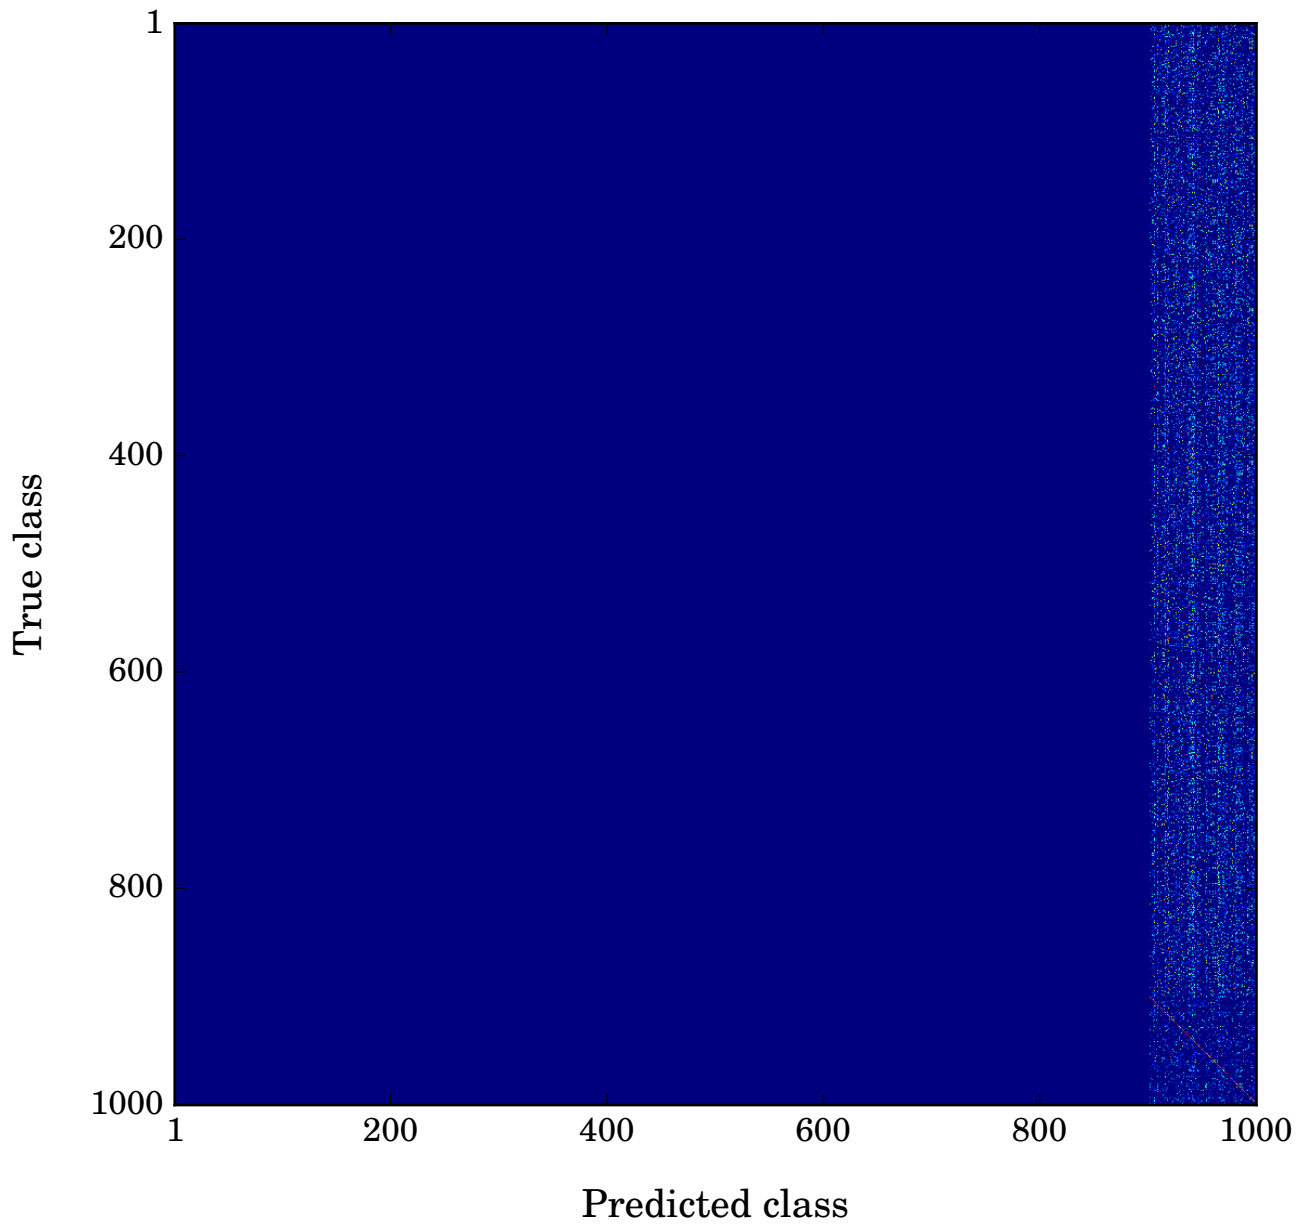


Figure 7. Confusion matrix for *finetuning* on *ILSVRC-large* (1000 classes in batches of 100)